




## 0222 Nickel-Plated Brass Hex Plug BSPP and Metric

| Part No.   | C BSPP | E (mm) | F (mm) | F1 (mm) | H (mm) | Wt. (kg) |
|------------|--------|--------|--------|---------|--------|----------|
| 0222 10 00 | G 1/8  | 5      | 13     | 5       | 8.5    | 0.006    |
| 0222 13 00 | G 1/4  | 5.5    | 16     | 6       | 9.5    | 0.01     |
| 0222 17 00 | G 3/8  | 5.5    | 20     | 8       | 10.5   | 0.019    |
| 0222 21 00 | G 1/2  | 7.5    | 24     | 10      | 12     | 0.031    |

| Part No.   | C metric | E (mm) | F (mm) | F1 (mm) | H (mm) | Wt. (kg) |
|------------|----------|--------|--------|---------|--------|----------|
| 0222 19 00 | M5X0.8   | 3.5    | 8      | 2.5     | 7      | 0.002    |
| 0222 55 00 | M7X1     | 5      | 10     | 3       | 8.5    | 0.003    |

With Integrated O-ring Seal

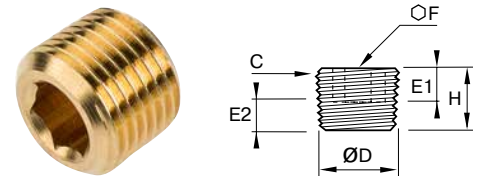

## 0205 Brass Internal Hex Head Plug NPT and BSPT

| Part No.   | C NPT | oD (in) | E1 (in) | E2 min (in) | E2 max (in) | F (in) | H (in) | Wt. (oz) |
|------------|-------|---------|---------|-------------|-------------|--------|--------|----------|
| 0205 11 00 | 1/8   | .40     | .24     | .12         | .20         | .79    | .31    | .141     |
| 0205 14 00 | 1/4   | .54     | .31     | .17         | .28         | .94    | .39    | .282     |
| 0205 18 00 | 3/8   | .67     | .31     | .18         | .29         | 1.22   | .43    | .494     |
| 0205 22 00 | 1/2   | .93     | .31     | .25         | .39         | 1.53   | .51    | .917     |
| 0205 28 00 | 3/4   | 1.04    | .43     | .27         | .41         | 2.16   | .67    | 1.834    |
| 0205 35 00 | 1     | 1.31    | .51     | .31         | .49         | 2.95   | .75    | 3.245    |

| Part No.   | C BSPT | oD (mm) | E1 (mm) | E2 min (mm) | E2 max (mm) | F (mm) | H (mm) | Wt. (kg) |
|------------|--------|---------|---------|-------------|-------------|--------|--------|----------|
| 0205 10 00 | R1/8   | 9.728   | 6       | 3.1         | 4.9         | 5      | 8      | .004     |
| 0205 13 00 | R1/4   | 13.157  | 8       | 4.7         | 7.3         | 6      | 10     | .008     |
| 0205 17 00 | R3/8   | 16.662  | 8       | 5.1         | 7.7         | 8      | 11     | .014     |
| 0205 21 00 | R1/2   | 20.955  | 8       | 6.4         | 10          | 10     | 13     | .027     |
| 0205 27 00 | R3/4   | 26.441  | 11      | 7.7         | 11.3        | 14     | 17     | .053     |
| 0205 34 00 | R1     | 33.249  | 13      | 8.1         | 12.7        | 17     | 19     | .092     |
| 0205 42 00 | R1-1/4 | 41.910  | 14      | 10.4        | 15          | 22     | 22     | .183     |
| 0205 49 00 | R1-1/2 | 47.803  | 14      | 10.4        | 15          | 24     | 22     | .250     |
| 0205 48 00 | R2     | 59.614  | 16      | 13.6        | 18.2        | 30     | 25     | .440     |

For BSP taper plus 1/2" - 1 1/2" inclusive - thread standard NFE 03-004 - DIN906



### WARNING

This product can expose you to chemicals including Lead and Lead Compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)